

Double Acting Counterbalance Valve With Coaxial Cavity

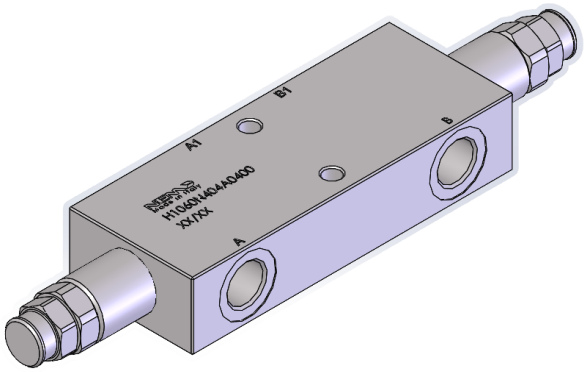



STEEL BODY


Max flow	**110,00 l/min**
Max working pressure (Steel body)	**410,00 bar**
Compensation	**Not Compensated**
Weight G 1/2"	**3,00 Kg**
Weight G 3/4"	**3,55 Kg**
Tamper proof code	**9021030190**

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD10X-C is recommended for circuits with high back pressure)

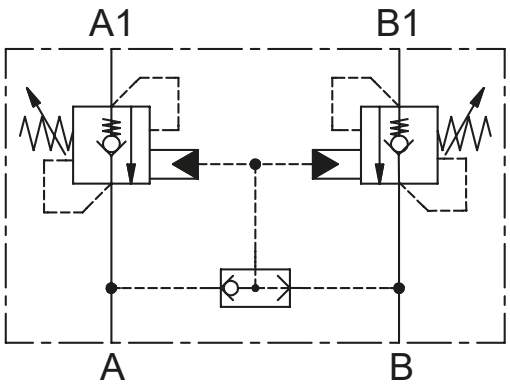

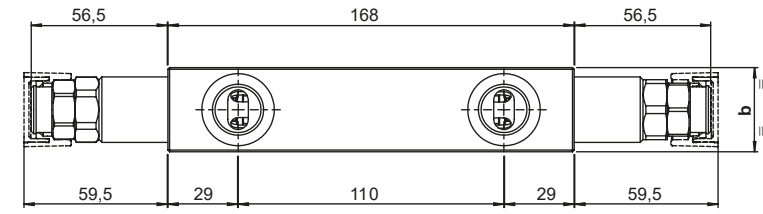

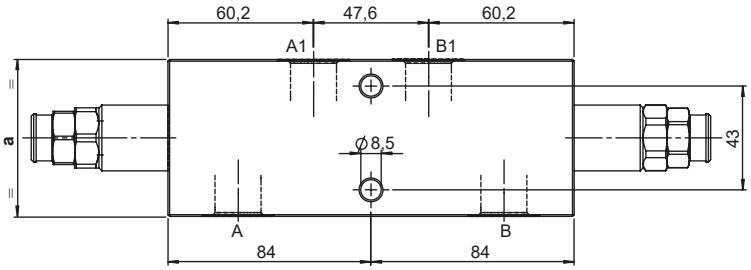

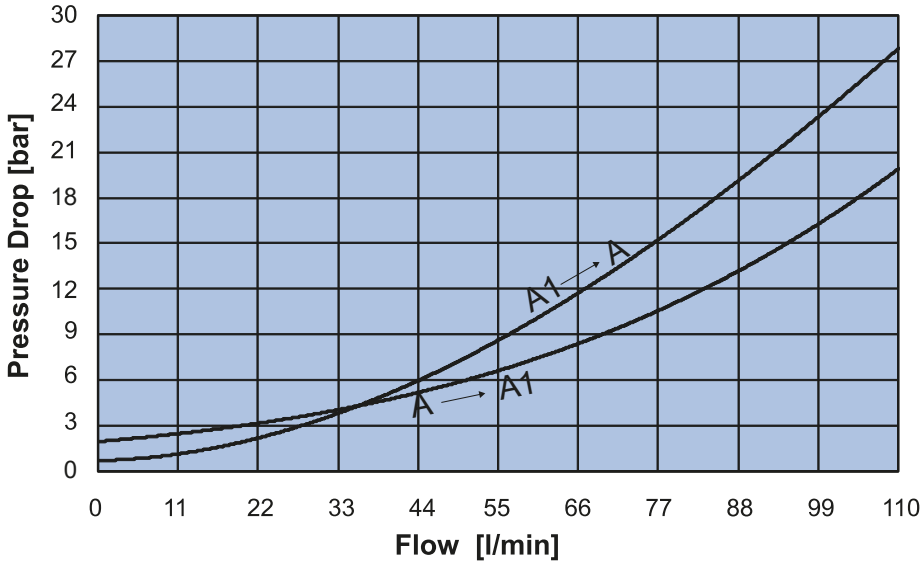

	a	b
04	65	35
05	70	40

H 1 0 6 0 N □ □ S □ 0 0

PILOT RATIO	
40	**4:1**
90	**9:1**

SPRINGS	rp 4:1		rp 9:1
	2	**4**	**4**
Setting range min.-max. [bar]	60 - 210	120 - 410	150 - 410
Pressure Increase [bar/turn]	52	85	100
Standard setting 4 l/min [bar]	200	350	350

PORTS	04	05
A,A1,B,B1	G 1/2”	G 3/4”