

Double Acting Counterbalance Valve

STEEL BODY


Max flow	**180,00 l/min**
Max working pressure (Steel body)	**410,00 bar**
Compensation	**Not Compensated**
Weight in Steel	**5,30 Kg**
Tamper proof code	**9021030190**

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD15X-C is recommended for circuits with high back pressure)

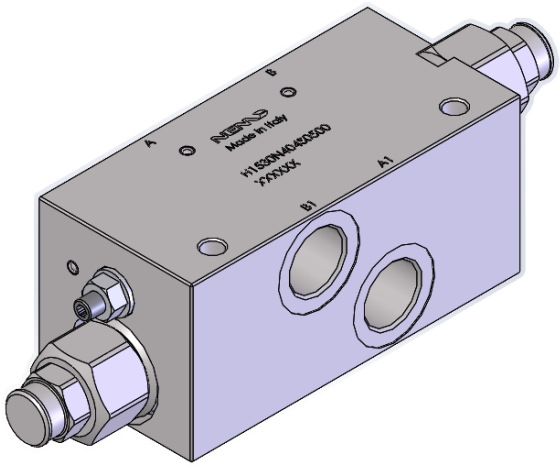


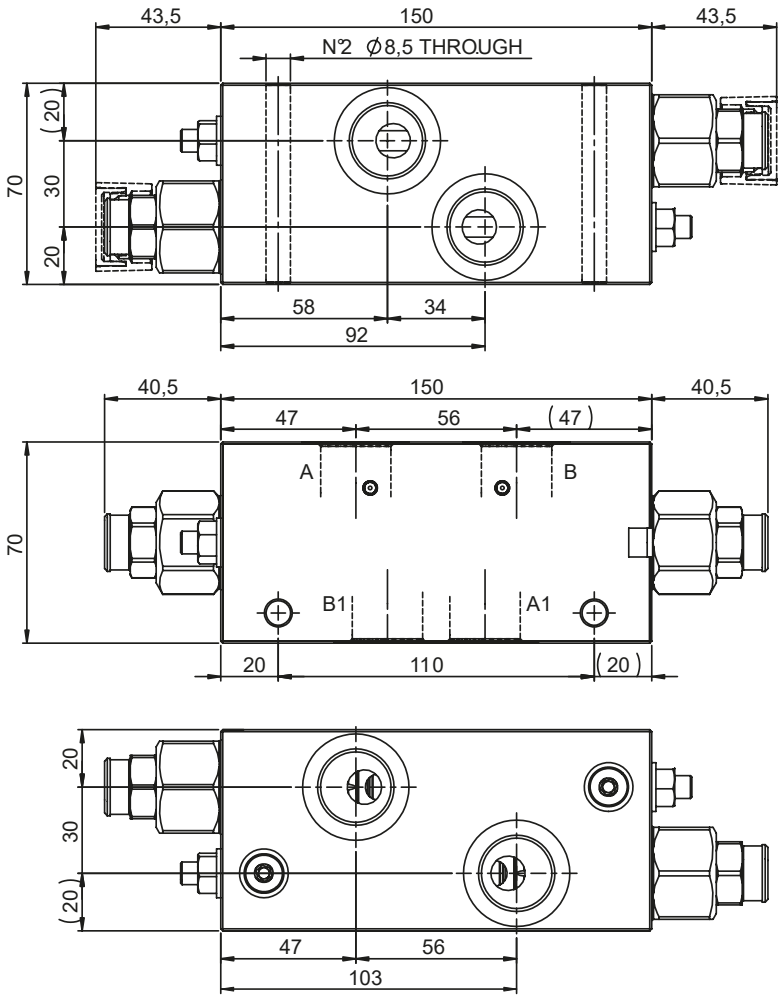


SCHEME 40 - 80

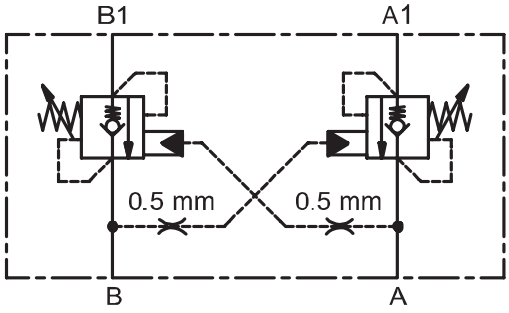

SCHEME 42 - 82

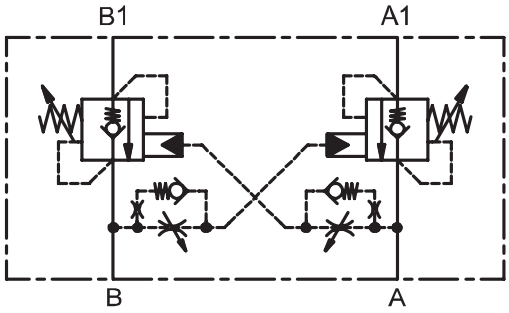

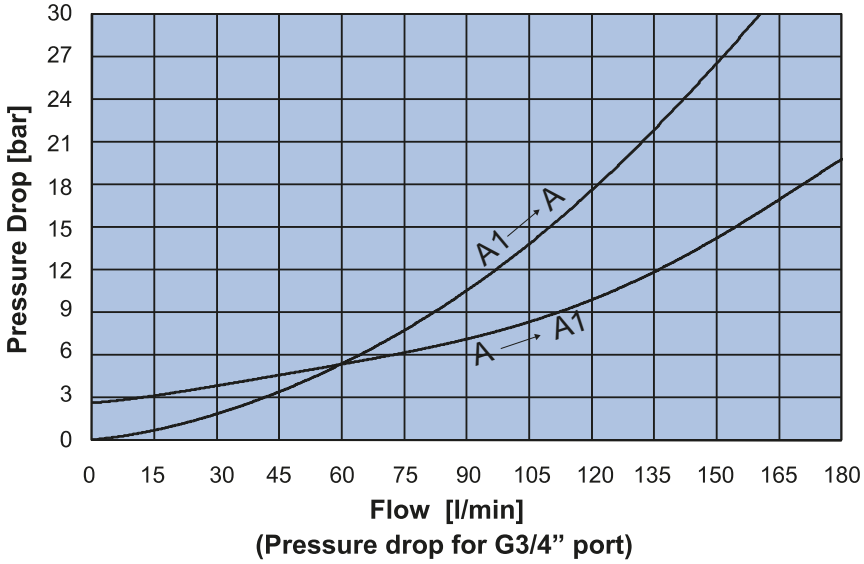

H 1 5 3 0 N □ □ S □ 0 0

PILOT RATIO		
40	4:1	
42	4:1	ADJUSTABLE DUMP SCREW
80	8:1	
82	8:1	ADJUSTABLE DUMP SCREW

SPRINGS	rp 4:1		rp 8:1
	2	4	4
Setting range min.-max. [bar]	80 - 210	80 - 410	140 - 410
Pressure Increase [bar/turn]	40	72	72
Standard setting 4 l/min [bar]	200	350	350

PORTS	05
A,A1,B,B1	G 3/4"