

Double Acting Counterbalance Valve With Coaxial Cavity

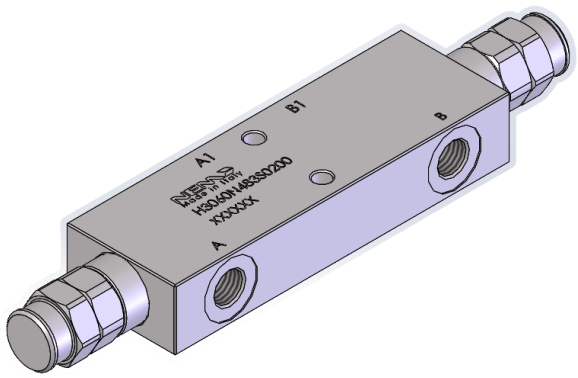



STEEL BODY


Max flow	**40,00 l/min**
Max working pressure (Steel body)	**350,00 bar**
Compensation	**Not Compensated**
Weight G 1/4"	**1,30 Kg**
Weight G 3/8"	**1,60 Kg**
Tamper proof code	**9021030190**

- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

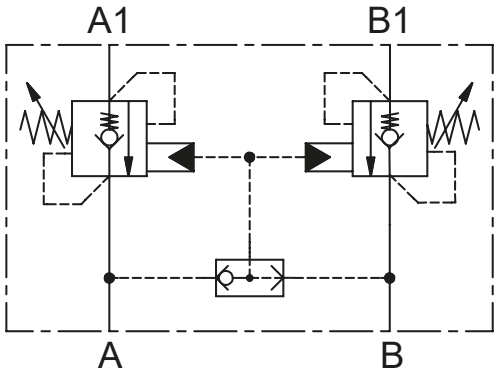

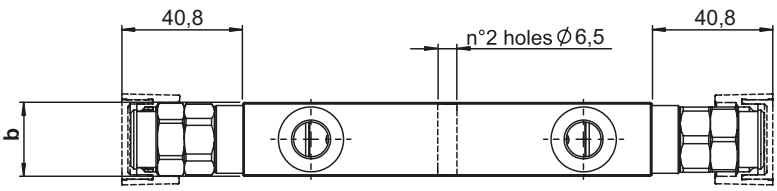

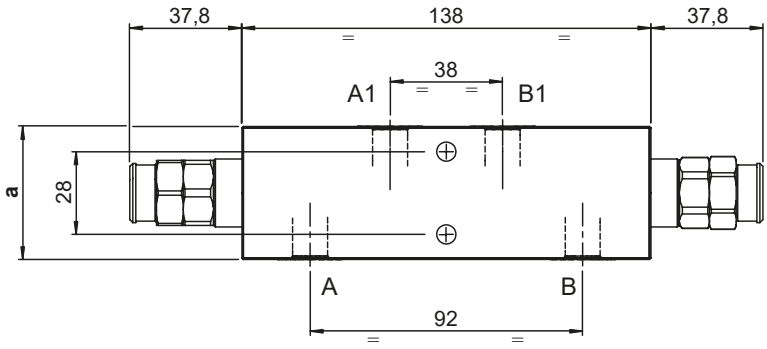

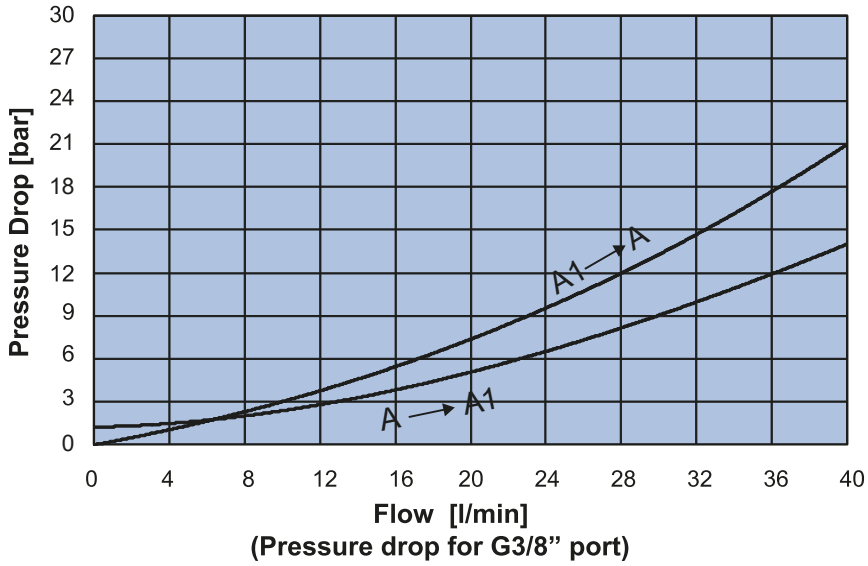

	a	b
02	45	25
03	50	30

H 3 0 6 0 N ☐ ☐ S ☐ 0 0

PILOT RATIO	
40	**4:1**

SPRINGS	2	3
Setting range min.-max. [bar]	80 - 210	150 - 350
Pressure Increase [bar/turn]	41	100
Standard setting 4 l/min [bar]	200	350

PORTS	02	03
A,B,A1,B1	G 1/4”	G 3/8”