

Double Acting Counterbalance Valve For Hydraulic Motors

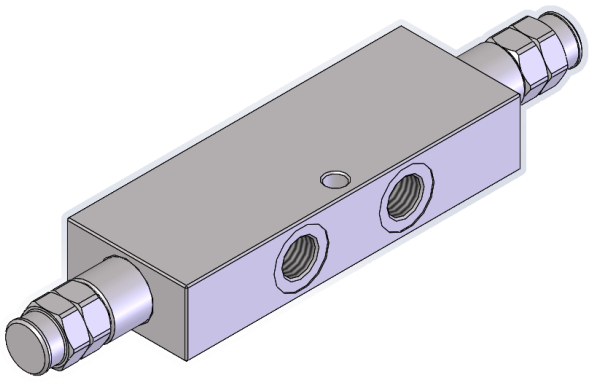



STEEL BODY


Max flow	**70,00 l/min**
Max working pressure (Steel body)	**350,00 bar**
Compensation	**Not Compensated**
Weight G 3/8"	**2,00 Kg**
Weight G 1/2"	**2,65 Kg**
Tamper proof code	**9021030190**

- Antishock valve pos.2 max flow 3 l/min
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD05X-C is recommended for circuits with high back pressure)

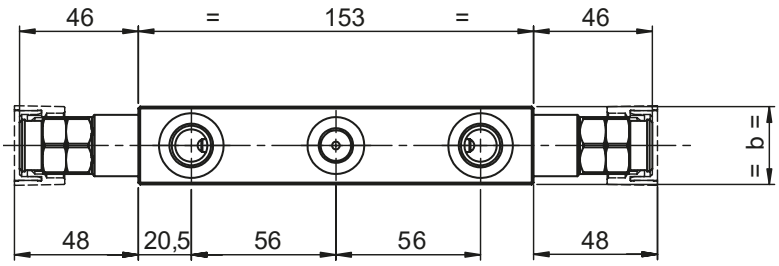

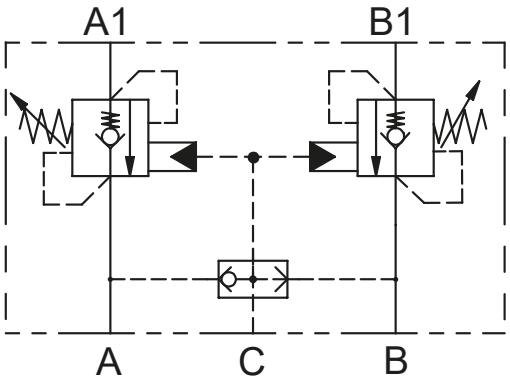

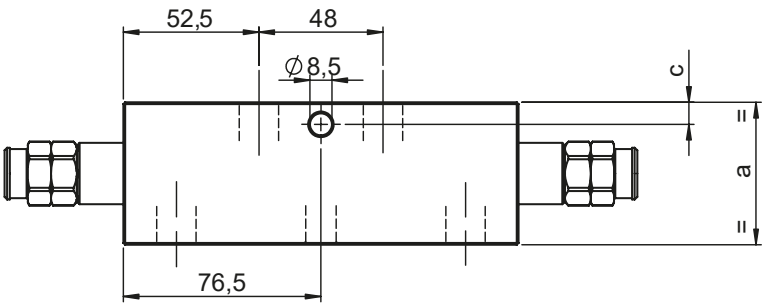

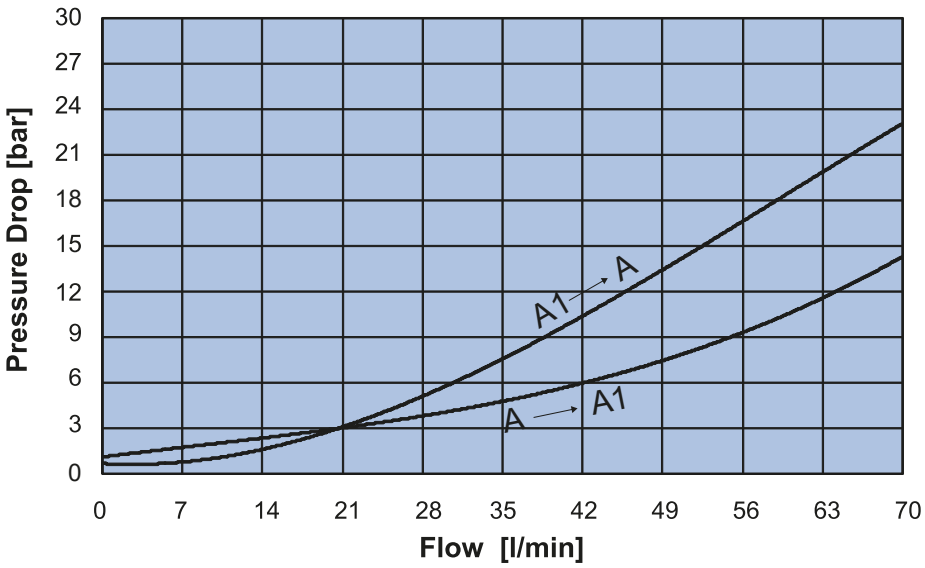

	a	b	c
03	55	30	8,5
04	65	35	11

H 5 0 6 0 N [ ] [ ] S [ ] 0 0

PILOT RATIO	
95	**9:1**

SPRINGS	rp 9:1
	2
Setting range min.-max. [bar]	80 - 250
Pressure Increase [bar/turn]	50
Standard setting 4 l/min [bar]	250

PORTS	03	04
A,B,A1,B1	G 3/8”	G 1/2”