


Load Lowering Control Valve - SAE Flanged 1/2"-SAE6000


STEEL BODY


Max flow	**150,00 l/min**
Max working pressure (Steel body)	**410,00 bar**
Compensation	**Fully Compensated with drain line**
Weight in Steel	**6,20 Kg**
Tamper proof CT1	**9021030191**
Tamper proof CT2	**9021015101**

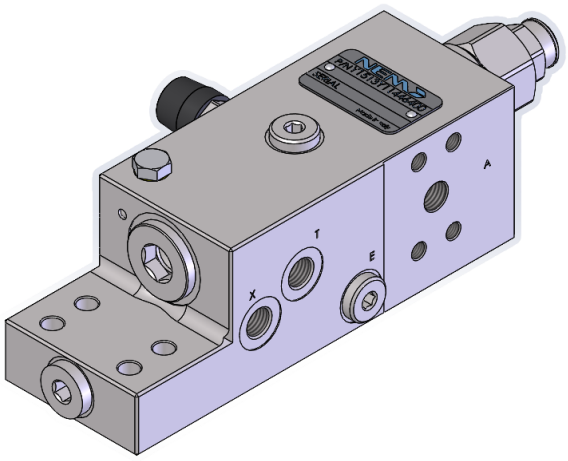

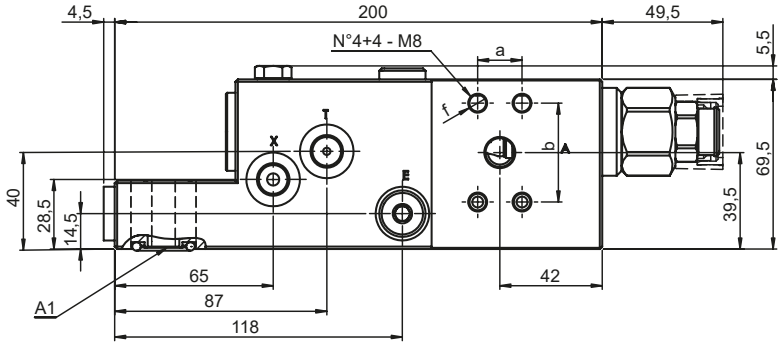

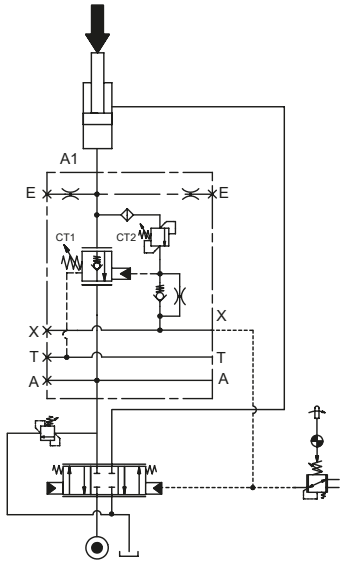

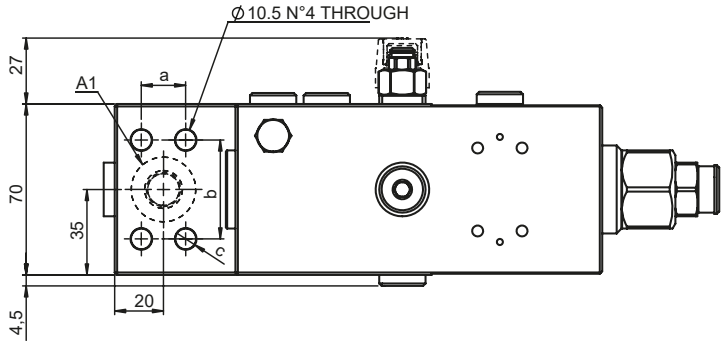

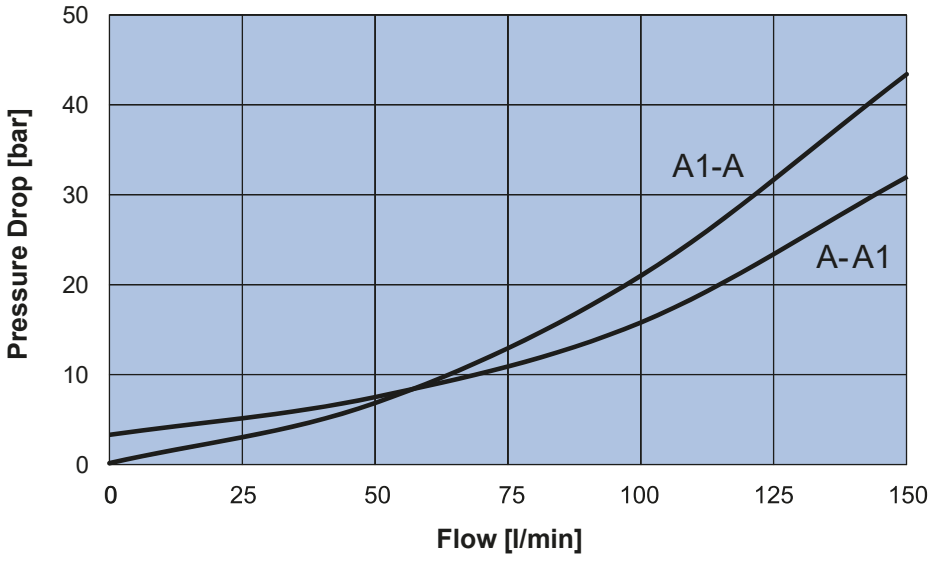

Flange	a	b	c	f	O-Ring
1/2"- SAE 6000	18,2	40,5	8,5	M 8	18,64x3,53 NBR 70°SH

Y 1 5 1 3 Y [ ] [ ] [ ] [ ] **0 0**

PILOT RATIO	
11	1:0 - FINE METERING

PORTS	64
A,A1	1/2 ”- SAE 6000
T-E-X	G 1/4”

SPRING CT1			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @20 cc/min [bar]
4	5 - 16	4.5	7.5

SPRING CT2			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @4 l/min [bar]
4	200 - 410	250	350