


Load Lowering Control Valve - SAE Flanged 3/4"-SAE6000

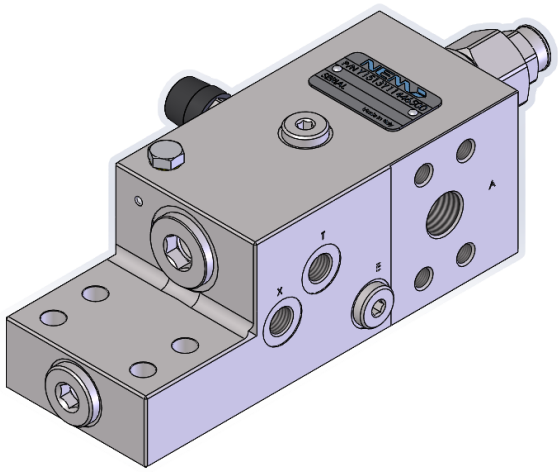



STEEL BODY

Max flow	**250,00 l/min**
Max working pressure (Steel body)	**410,00 bar**
Compensation	**Fully Compensated with drain line**
Weight in Steel	**8,00 Kg**
Tamper proof CT1	**9021030191**
Tamper proof CT2	**9021015101**

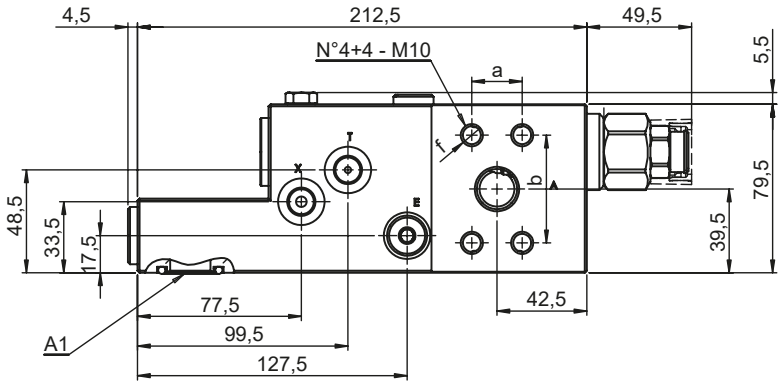

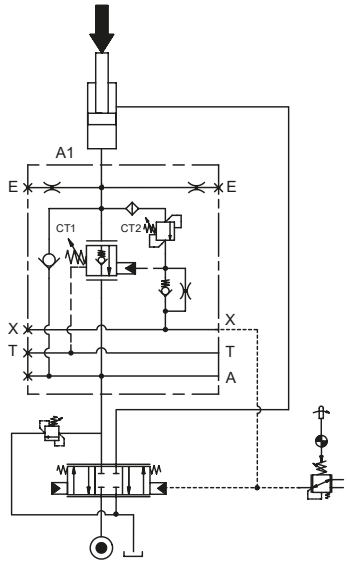

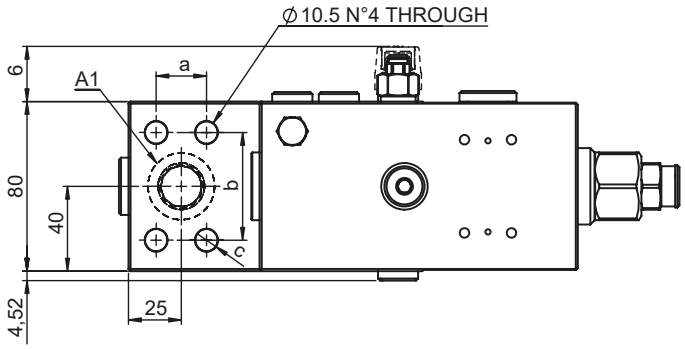

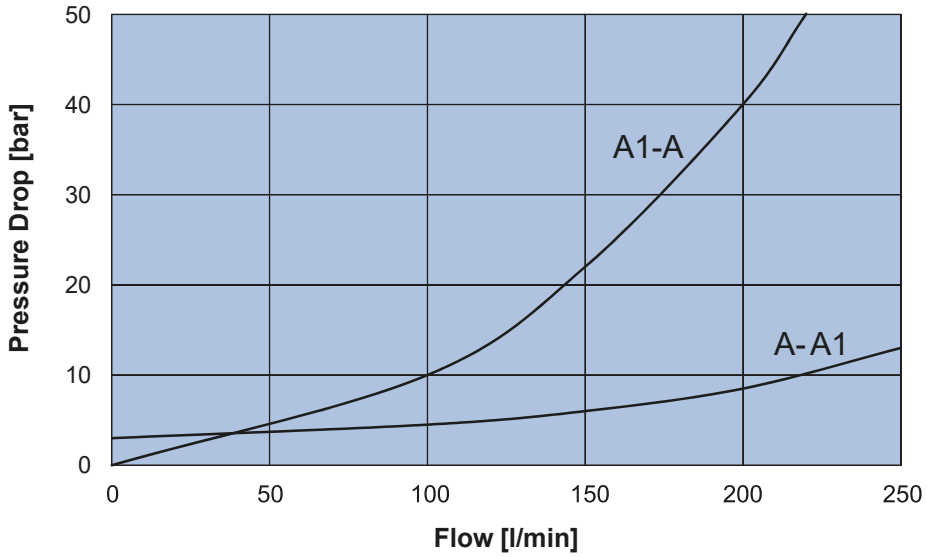

Flange	a	b	c	f	O-Ring
3/4"- SAE 6000	23,8	50,8	10,5	M 10	23,39x3,53 NBR 70°SH

Y 1 5 1 3 Y □ □ □ □ **0 0**

PILOT RATIO	
11	1:0 FINE METERING

PORTS	65
A,A1	3/4 ”- SAE 6000
T-E-X	G 1/4”

SPRING CT1			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @20 cc/min [bar]
4	5 - 16	4,5	7,5

SPRING CT2			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @4 l/min [bar]
4	200 - 410	250	350