


Load Lowering Control Valve - SAE Flanged 1"-SAE6000


STEEL BODY


Max flow	**400,00 l/min**
Max working pressure (Steel body)	**410,00 bar**
Compensation	**Fully Compensated with drain line**
Weight in Steel	**12,00 Kg**
Tamper proof CT1	**9021030191**
Tamper proof CT2	**9021015101**

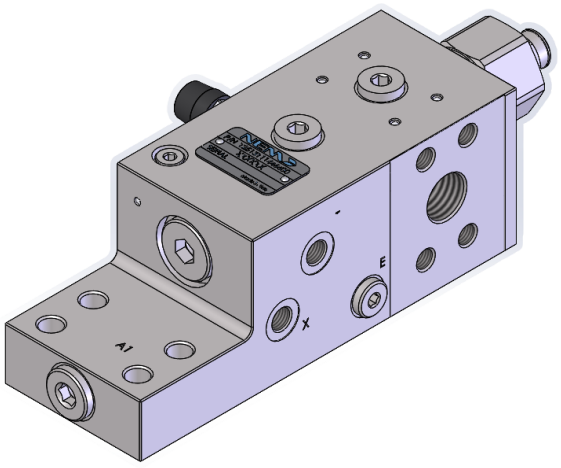

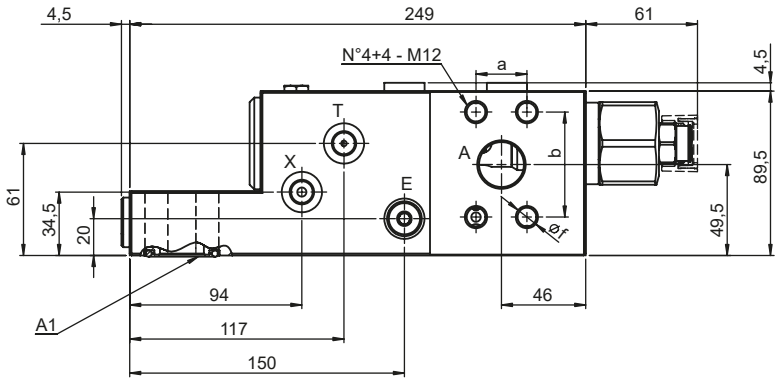

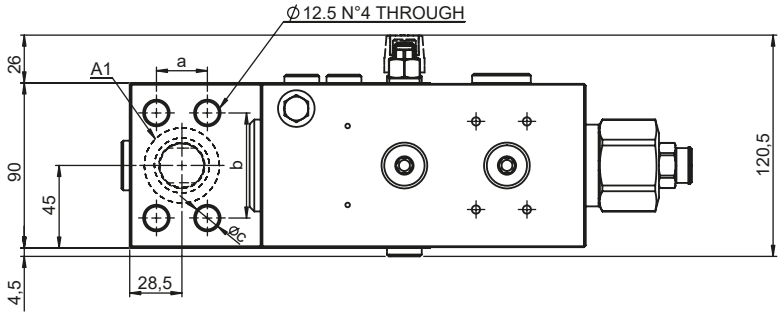

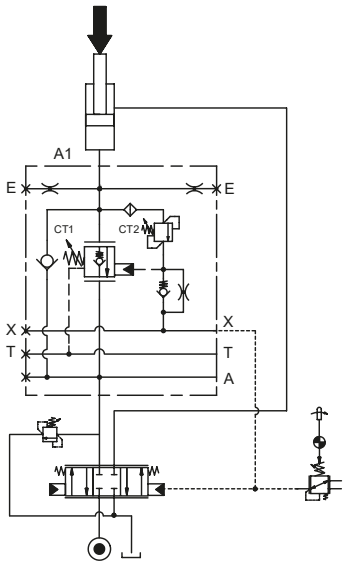

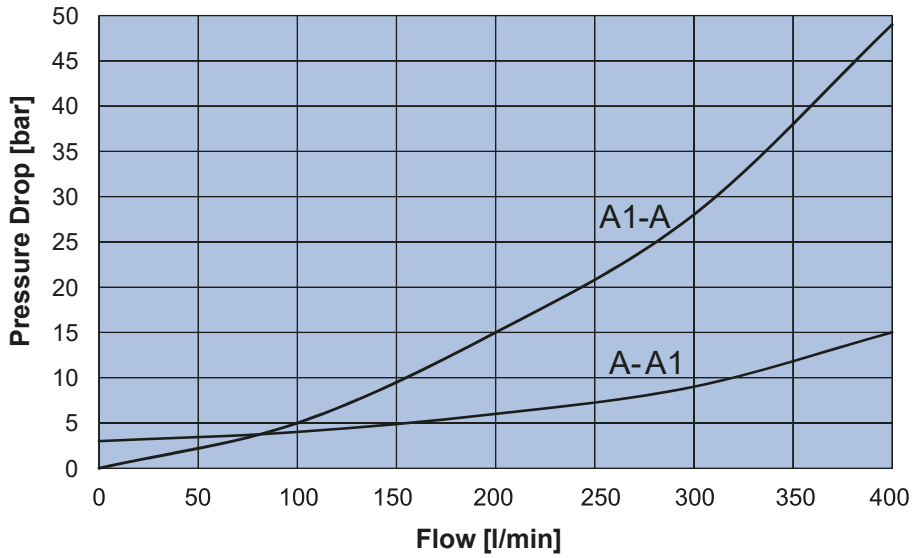

Flange	a	b	c	f	O-Ring
1"- SAE 6000	27,8	57,2	12,5	M 12	32,92x3,53 NBR 70°SH

Y 2 5 1 3 Y [ ] [ ] [ ] [ ] 0 0

PILOT RATIO	
11	1:0 - FINE METERING

PORTS	66
A,A1	1”- SAE 6000
T,E,X	G 1/4”

SPRING CT1			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @20 cc/min [bar]
4	5 - 14	2.3	7.5

SPRING CT2			
	Setting Range min.-max. [bar]	Pressure Increase [bar/turn]	Standard Setting @4 l/min [bar]
4	200 - 420	250	350