

Regolatore di flusso in linea

In-line flow control

Réducteur de débit en ligne

Drosselrückschlagventil



1	Corpo Body Corps Körper	2	Regolatore Needle valve Réducteur de débit Drosselventil	3	Pomolo Handwheel Volant moleté Rändelkopf	4	Spillo Needle Epingle Nadel	5	Dado Nut Ecrou Überwurfmutter	6	Guarnizioni Seals Joint d'étanchéité Dichtung
Acciaio inox AISI 316L (1.4404) Stainless steel AISI 316L (1.4404) Acier inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404) FPM conforme FDA FPM compliant with FDA FPM conforme à FDA FPM, FDA konform											




-20° ÷ 150°C



10 bar

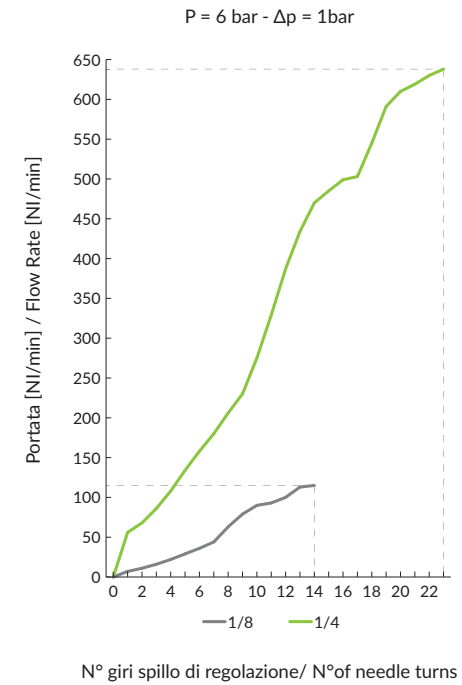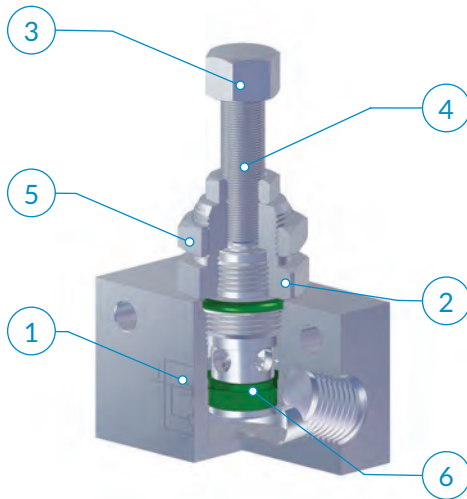

Type	D1	D2	D3	L1	L2 max	L3	L4	L5	L6	H1	g
21 00 18	G1/8	4,5	M12x0,75	20	51,6	34	24	7,5	15	14	72,5
21 00 14	G1/4	5,4	M18x1	30	74,6	50	35	12	25	21	281,4

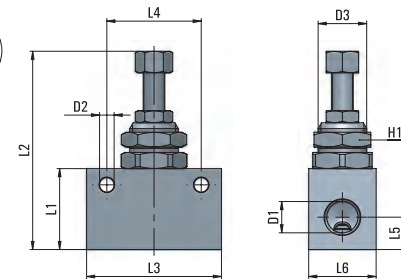

Disponibile nelle versioni:
Available as:
Disponible:
Verfügbar:



Tubi di collegamento consigliati:

Variabili in funzione del tipo di raccordo collegato al regolatore.

Recommended tubings:

According to the fitting connected to the flow control.

Tubes conseillés:

En fonction du raccord monté sur le réducteur.

Empfohlene Schläuche:

Die Schläuche werden durch die am Drosselrückschlagventil montierte Verschraubung bestimmt.

Campi di applicazione:

Impianti pneumatici alimentati con aria filtrata e lubrificata.

Application field:

Pneumatic installations fed with filtered, lubricated air.

Domaines d'application:

Circuits pneumatiques avec air filtré et lubrifié.

Anwendungsbereiche:

Pneumatische Anlage mit gefilterter und geölter Druckluft.

AP	55
AR	63
AV	221
CO	157
CX	255
EV	217
GU	119
GU Safety	135
GX	281
GX Safety	291
HP	317
MA	27
MB	41
MC	83
MF	235
MM	333
MO	93
MP	323
MT	339
MV	171
MX	241
MY	229
OX	261
PA	113
PE	79
PM	329
PN	67
PT	347
PU	131
PU Safety	149
PUX	287
PV	203
PVX	311
PX	249
QO	363
RA	101
RF	269
RT	355
RX	275
Tools	369
Tubings	375
VF	295
VT	359
VX	299