

60°- KONUS - AUSSENGEWINDE


60°- MALE - CONE



EDELSTAHL / STAINLESS STEEL
VERBINDUNGSTECHNIK
FLUID CONNECTORS

Mit 60°-Innenkonus und angedrehter Dichtkante Form B
Gewinde: BSP - Zylindrisch

With 60°-Cone and Sealing Shoulder
Form B
Thread: BSP - Parallel

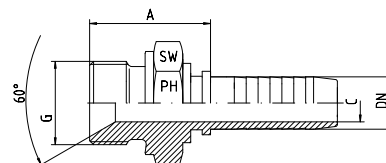

Schlauch Hose	DN Bore	Gewinde Thread	Ca. Maße Approx. Dimensions			Bemerkungen Notes	Bestellzeichen Order-Code
DN	in.	G	A	C	SW		
05	3/16"	1/8"-28	21,5	3,0	14		AGR-1/8"-DN 05
06	1/4"	1/8"-28	23,5	4,0	14		AGR-1/8"-DN 06
05	3/16"	1/4"-19	25,0	3,0	19		AGR-1/4"-DN 05
06	1/4"	1/4"-19	25,5	4,0	19		AGR-1/4"-DN 06
08	5/16"	1/4"-19	28,0	5,5	19		AGR-1/4"-DN 08
10	3/8"	1/4"-19	28,0	6,0	19		AGR-1/4"-DN 10
12	1/2"	1/4"-19	27,0	7,0	19		AGR-1/4"-DN 12
06	1/4"	3/8"-19	30,5	4,0	22		AGR-3/8"-DN 06
08	5/16"	3/8"-19	26,5	5,5	22		AGR-3/8"-DN 08
10	3/8"	3/8"-19	30,0	7,0	22		AGR-3/8"-DN 10
12	1/2"	3/8"-19	30,5	9,5	22		AGR-3/8"-DN 12
06	1/4"	1/2"-14	34,5	4,0	27		AGR-1/2"-DN 06
08	5/16"	1/2"-14	31,5	5,5	27		AGR-1/2"-DN 08
10	3/8"	1/2"-14	32,0	7,0	27		AGR-1/2"-DN 10
12	1/2"	1/2"-14	31,0	9,5	27		AGR-1/2"-DN 12
16	5/8"	1/2"-14	32,0	12,5	27		AGR-1/2"-DN 16
19	3/4"	1/2"-14	37,5	14,5	27		AGR-1/2"-DN 19
16	5/8"	5/8"-14	32,5	12,5	30		AGR-5/8"-DN 16
12	1/2"	3/4"-14	34,5	9,5	32		AGR-3/4"-DN 12
16	5/8"	3/4"-14	35,0	12,5	32		AGR-3/4"-DN 16
19	3/4"	3/4"-14	38,0	14,5	32		AGR-3/4"-DN 19
25	1"	3/4"-14	38,0	19,5	36		AGR-3/4"-DN 25
19	3/4"	1"-11	41,5	14,5	41		AGR-1"-DN 19
25	1"	1"-11	42,0	20,0	41		AGR-1"-DN 25
31	1 1/4"	1"-11	42,0	25,5	41		AGR-1"-DN 31
25	1"	1 1/4"-11	45,0	20,0	50		AGR-1 1/4"-DN 25
31	1 1/4"	1 1/4"-11	45,0	25,5	50		AGR-1 1/4"-DN 31
31	1 1/4"	1 1/2"-11	45,0	25,5	55		AGR-1 1/2"-DN 31
38	1 1/2"	1 1/2"-11	48,0	31,5	55		AGR-1 1/2"-DN 38
51	2"	2"-11	50,0	41,0	70		AGR-2"-DN 51