

Ratio 1:1
Flow rate 35 l/min





P/N OE26090

P/N OE26094

AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 500

P/N	OE26090	OE26091	OE26093	OE26094
Seals	VITON			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F3/4"G	F3/4"G	F3/4"G	F3/4"G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	250	250	250
Noise level	dB	81	81	81
Max deliverable oil viscosity	SAE	80	80	80
Bung adaptor	-	OE38051	OE38051	OE38051
Suitable for drums or tank	modular	customisable 1"	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing	No.- m ³	1 - 0,010	1 - 0,020	1 - 0,020
Weight	Kg	5,5	6,0	7,2
Dimensions (A x B x C)	mm	332 - 208 - 50	332 - 740 - 50	332 - 940 - 50

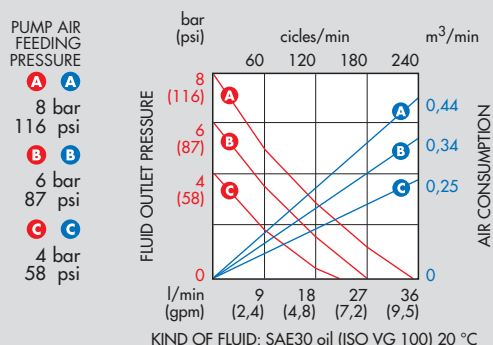

Ratio 1:1
Flow rate 23 l/min





P/N OE33060

P/N OE33096

AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 600

P/N	OE33060	OE33094	OE33096
Seals	TEFLON		
Compatible fluids	Oil, lubricants and similar		
Suction tube upper body	Aluminium		
Suction tube	Carbon steel		
Air inlet connection	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G
Air working pressure	bar	6 - 8	6 - 8
Average air consumption	l/min	230	230
Noise level	dB	81	81
Max deliverable oil viscosity	SAE	80	80
Bung adaptor	-	-	OE38042 standard
Suitable for drums or tank	modular	for drums 180 - 220 Kg	for drums 180 - 220 Kg
Packing	No.- m ³	1 - 0,006	1 - 0,020
Weight	Kg	4,3	6,2
Dimensions (A x B x C)	mm	355 - 0 - 0	355 - 940 - 42

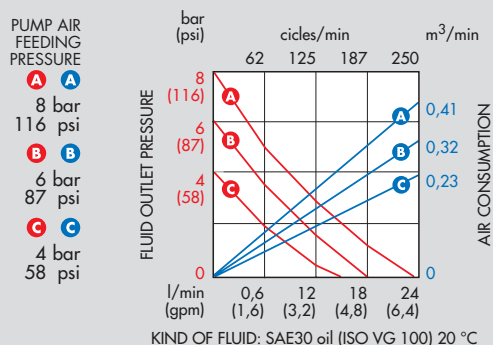

Ratio 3:1
Flow rate 20 l/min





P/N OE35060

P/N OE35094

AIR-OPERATED PUMPS FOR OIL AND SIMILAR S. 500

P/N	OE35060	OE35061	OE35076	OE35094
Seals	VITON			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G	F1/2"G
Air working pressure bar	4 - 8	4 - 8	4 - 8	4 - 8
Average air consumption l/min	350	350	350	350
Noise level dB	81	81	81	81
Max deliverable oil viscosity SAE	130	130	130	130
Bung adaptor	-	OE38046	OE38046	OE38046
Suitable for drums or tank	modular	customisable 1"	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing No.-m ³	1 - 0,01	1 - 0,01	1 - 0,01	1 - 0,01
Weight Kg	5,35	5,8	5,8	6,5
Dimensions (A x B x C) mm	332 - 200 - 32	332 - 185 - 32	332 - 740 - 32	332 - 940 - 32

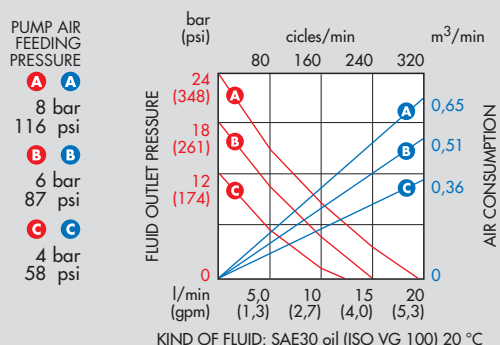

Ratio 3:1
Flow rate 14 l/min





P/N OE35160

P/N OE35196

AIR-OPERATED PUMPS FOR OIL AND SIMILAR S. 600

P/N	OE35160	OE35161	OE35163	OE35173	OE35194
P/N				OE35176	OE35196
Seals	NBR				
Compatible fluids	Oil, lubricants and similar				
Suction tube upper body	Aluminium				
Suction tube	Carbon steel				
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G	F1/2"G	F1/2"G
Air working pressure bar	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8
Average air consumption l/min	330	330	330	330	330
Noise level dB	81	81	81	81	81
Max deliverable oil viscosity SAE	130	130	130	130	130
Bung adaptor	-	OE38042	OE38042	standard on OE35176	standard on OE35196
Suitable for drums or tank	modular	customisable 1"	tank	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing No.-m ³	1 - 0,01	1 - 0,01	1 - 0,02	1 - 0,020	1 - 0,020
Weight Kg	4,4	5,0	6,8	5,8	6,5
Dimensions (A x B x C) mm	285-285-42	285-220-42	285-125-42	285-740-42	285-940-42

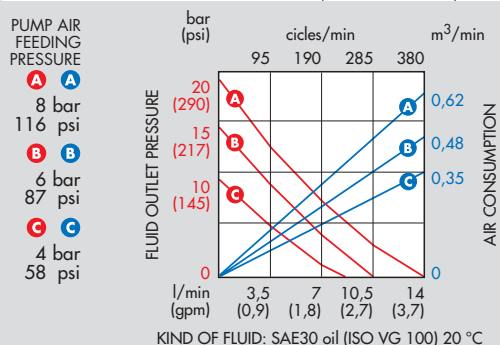



Ratio 1:1
Flow rate 30 l/min



P/N OE33360 P/N OE33396

S/STEEL AISI 304 PUMPS FOR TRANSFER ANTIFREEZE LIQUID, WINDSHIELD WASHING LIQUID S. 600

P/N	OE33360	OE33396
Seals	VITON	
Compatible fluids	Suitable for antifreeze and windshield washing liquid	
Suction tube upper body	Stainless steel AISI 304	
Suction tube	Stainless steel AISI 304	
Air inlet connection	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G
Air working pressure bar	6 - 8	6 - 8
Average air consumption l/min	370	370
Noise level dB	81	81
Max deliverable oil viscosity SAE	50	50
Bung adaptor	-	OE33434
Suitable for drums or tank	modular	for drums 180 - 220 Kg
Packing No.- m ³	1 - 0,10	1 - 0,20
Weight Kg	5,3	7,4
Dimensions (A x B x C) mm	410 - 0 - 0	410 - 940 - 34

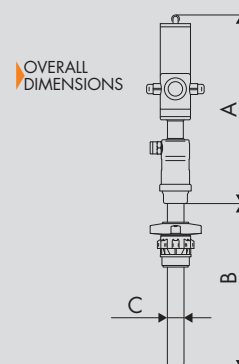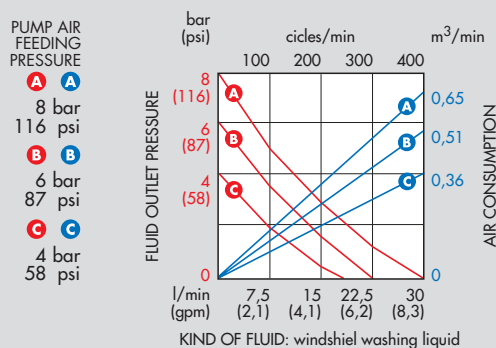


Ratio 1:1
Flow rate 30 l/min



P/N OE33300

S/STEEL AISI 304 MODULAR PUMPS FOR TRANSFER ANTIFREEZE LIQUID, WINDSHIELD WASHING LIQUID S. 600

P/N	OE33300	OE33301
Seals	VITON	
Compatible fluids	Suitable for antifreeze and windshield washing liquid	
Suction tube upper body	Stainless steel AISI 304	
Suction tube	Stainless steel AISI 304	
Air inlet connection	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G
Air working pressure bar	6 - 8	6 - 8
Average air consumption l/min	370	370
Noise level dB	81	81
Max deliverable oil viscosity SAE	50	50
Bung adaptor	OE33434	OE33434
Suitable for drums or tank	for drums 200 L	for tank 1000 L
Packing No.- m ³	1 - 0,29	1 - 0,31
Weight Kg	11,4	11,8
Dimensions (A x B x C) mm	410 - 940 - 34	410 - 1260 - 34

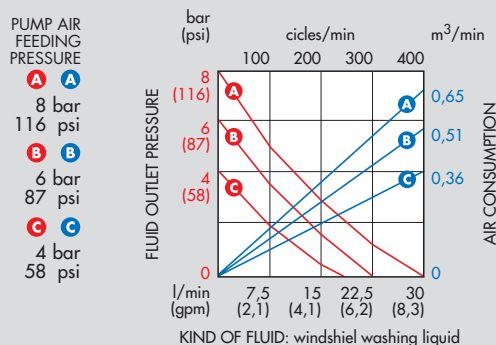

P/N OE33360

P/N OE33115

P/N OE33426

P/N OE33434



P/N OE33445

Antifreeze and windshield liquid gun in alluminium S. 1/2" 40AN with "Viton" seals



ACCESSORIES FOR OIL PUMPS

P/N OE38046

Bung adaptor $\varnothing$ 32 mm, with double body
for pumps with suction tube, Series 500



P/N OE33434

Bung adaptor $\varnothing$ 34 mm, with double body
for pumps with suction tube, Series 600

P/N OE38042

Bung adaptor $\varnothing$ 42 mm, with double body
for pumps with suction tube, Series 600 e 650

P/N OE38044

Bung adaptor $\varnothing$ 38 mm, with double body
for manual double acting oil pumps

P/N OE38051

Bung adaptor $\varnothing$ 50 mm, for pumps with suction tube, Series 500



P/N OE10/14

Bung adaptor $\varnothing$ 45 mm, for industrial pumps with suction tube, Series 900 and 1200

P/N OE10/15

Bung adaptor $\varnothing$ 53 mm, for industrial pumps with suction tube, Series 900 and 1200

P/N OE38047

Wall bracket $\varnothing$ 32 mm, with double body for
wall-mounting of pumps, Series 500



P/N OE38043

Wall bracket $\varnothing$ 42 mm, with double body for
wall-mounting of pumps, Series 600 and 650

P/N OE38052

Wall bracket $\varnothing$ 50 mm, with clamping system with
screw for wall-mounting of pumps,
Series 500



P/N OE33115

Wall bracket in steel for wall-mounting
of transfer pumps,
Series 600 and 650



P/N OE33590

Wall bracket in painted steel for wall-mounting
of diaphragm pumps 1/2" and 3/4"



P/N OE33591

Wall bracket in painted steel for wall-mounting
of diaphragm pumps 1" and 1.1/4"