


BSPP FEMALE - 90° ELBOW (THRUST-WIRE NUT) (1)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING

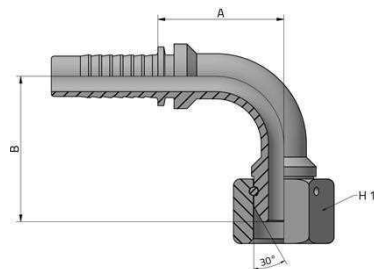


	Code	D.N.	Hose size mm	Hose size inch	T inch	T/1 inch	A mm	B mm	H1 mm	PN bar	PN psi
*	F90G0302SP	3	4,8	3/16	1/8	28	23	29	14	350	5076
*	F90G0304SP	3	4,8	3/16	1/4	19	23	29	19	415	6019
*	F90G0402SP	4	6,4	1/4	1/8	28	23	29	14	350	5076
*	F90G0404SP	4	6,4	1/4	1/4	19	23	29	19	450	6526
*	F90G0406SP	4	6,4	1/4	3/8	19	23	32	22	450	6526
*	F90G0408SP	4	6,4	1/4	1/2	14	31,5	39	27	450	6526
*	F90G0504SP	5	7,9	5/16	1/4	19	31,5	33,5	19	350	5076
*	F90G0506SP	5	7,9	5/16	3/8	19	31,5	35,5	22	350	5076
*	F90G0508SP	5	7,9	5/16	1/2	14	31,5	39	27	350	5076
*	F90G0604SP	6	9,5	3/8	1/4	19	33	37	19	450	6526
*	F90G0606SP	6	9,5	3/8	3/8	19	33	38	22	450	6526
*	F90G0608SP	6	9,5	3/8	1/2	14	33	42	27	450	6526
*	F90G0806SP	8	12,5	1/2	3/8	19	39	43	22	415	6019
*	F90G0808SP	8	12,5	1/2	1/2	14	39	45	27	415	6019
	F90G0812SP	8	12,5	1/2	3/4	14	39	51	32	415	6019
*	F90G1008SP	10	16	5/8	1/2	14	49	54	27	350	5076
	F90G1012SP	10	16	5/8	3/4	14	49	56	32	350	5076
*	F90G1208SP	12	19	3/4	1/2	14	53,5	56	27	350	5076
	F90G1212SP	12	19	3/4	3/4	14	53,5	59	32	350	5076
	F90G1216SP	12	19	3/4	1	11	53,5	65	38	350	5076
	F90G1612SP	16	25,4	1	3/4	14	68,5	72	32	350	5076
	F90G1616SP	16	25,4	1	1	11	73	72	38	280	4061
	F90G1620SP	16	25,4	1	1 1/4	11	73	80	50	280	4061
	F90G2020SP	20	31,8	1 1/4	1 1/4	11	89	93	50	210	3046
	F90G2024SP	20	31,8	1 1/4	1 1/2	11	89	98,5	55	210	3046
	F90G2424SP	24	38,1	1 1/2	1 1/2	11	101	114	55	185	2683

* Without o-ring / senza o-ring

BSPP FEMALE - 90° ELBOW (THRUST-WIRE NUT) (2)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING

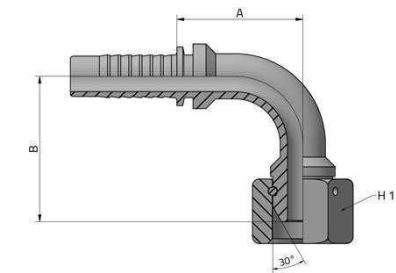

Code	D.N.	Hose size mm	Hose size inch	T inch	T/1 inch	A mm	B mm	H1 mm	PN bar	PN psi
F90G2432SP	24	38,1	1 1/2	2	11	101	118	70	185	2683
F90G3232SP	32	50,8	2	2	11	135	136	70	165	2393

* Without o-ring / senza o-ring