


HyperSpiral BSPP FEMALE 45° ELBOW THRUST-WIRE NUT

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING

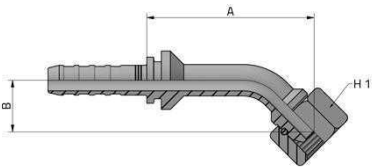

Code	D.N.	Hose size mm	Hose size inch	T inch	T/1 inch	A mm	B mm	H1 mm	PN bar	PN psi
HF45G0606SP	6	9,5	3/8	3/8	19	63,1	22,1	22	420	6091
HF45G0608SP	6	9,5	3/8	1/2	14	65,4	24,4	27	420	6091
HF45G0806SP	8	12,5	1/2	3/4	14	67,5	20	22	420	6091
HF45G0808SP	8	12,5	1/2	1/2	14	70,2	23,7	27	420	6091
HF45G0812SP	8	12,5	1/2	3/4	14	70,9	21,4	32	420	6091
HF45G1008SP	10	16	5/8	1/2	14	70,6	26,1	27	420	6091
HF45G1012SP	10	16	5/8	3/4	14	70,9	26,4	32	420	6091
HF45G1208SP	12	19	3/4	1/2	14	68,2	28,7	27	420	6091
HF45G1212SP	12	19	3/4	3/4	14	69,9	30,4	32	420	6091
HF45G1216SP	12	19	3/4	1	11	71,6	32,1	38	420	6091
HF45G1612SP	16	25,4	1	3/4	14	93,1	38,6	32	420	6091
HF45G1616SP	16	25,4	1	1	11	97,6	43,1	38	420	6091
HF45G1620SP	16	25,4	1	1 1/4	11	98,1	43,6	50	420	6091
HF45G2020SP	20	31,8	1 1/4	1 1/4	11	117,3	43,6	50	420	6091
HF45G2024SP	20	31,8	1 1/4	1 1/2	11	117	44,3	55	420	6091

Without o-ring / senza o-ring