


RHR330G20B3/AB1

printed on: 14-06-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

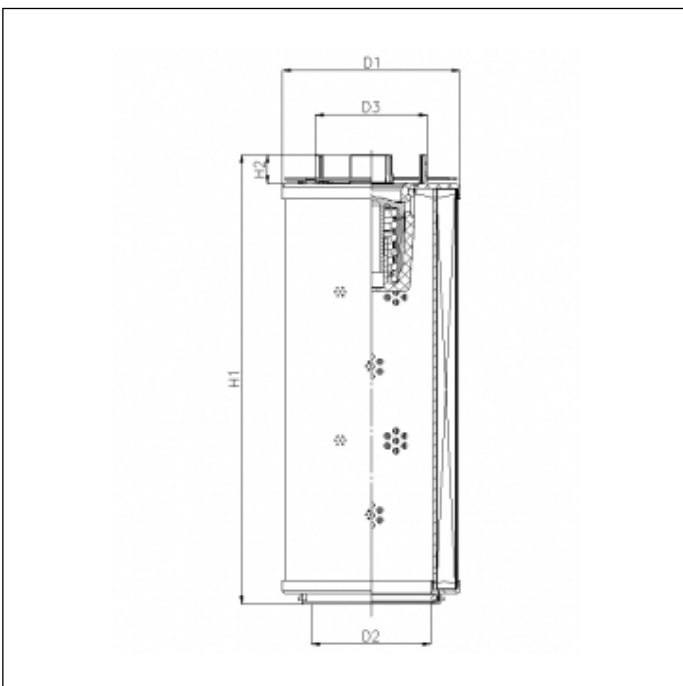

OVERALL DIMENSIONS

D1	94,5 mm
D2	48,2 mm
D3	45,8 mm
H1	194,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only